

## BIOPROCESS SYSTEMS ENGINEERING (BSE) APPLIED TO THE PRODUCTION OF BIOETHANOL FROM SUGARCANE BAGASSE

Roberto de Campos GIORDANO

Center for Exact Sciences and Technology / Federal University of São Carlos (UFSCar)

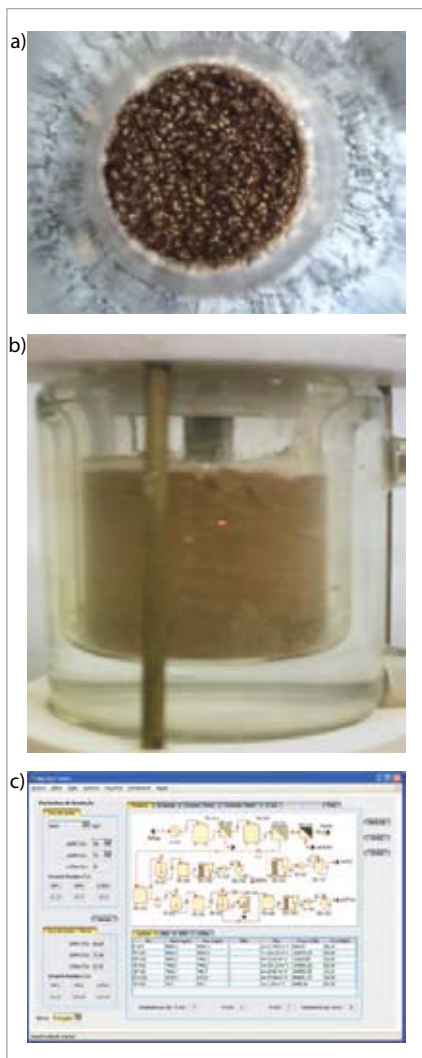


Figure 1. From micro scale to plant-wide optimization: (a) Cellulase-production fungus on bagasse substrate. (b) Lab scale bioreactor operating with immobilized pool of cellulolytic enzymes. (c) Biorefinery flowsheet: graphical user interface of the simulation toolbox of the web application

The industrial production of biofuels, understood as fuels produced from biological feedstock, is presently at what can be called a technological crossroad, and a hard competition among different technologies is in course. The winners will be defined by a combination of economical criteria, process robustness and compliance to environmental and sustainability restrictions. In this scenario the optimization of this complex, interconnected process ideally must be pursued ever since its early stages of development, aiming at costs reduction, negative overall CO<sub>2</sub> balance, cutback of water usage and of effluent emissions and so forth. Fine-tuned processes, operating at (near-) optimum conditions will have a significant competitive advantage.

This project focuses on the rational application of (Bio-)Process Systems Engineering (BSE) techniques to the process for production of bioethanol from an important lignocellulosic material in the Brazilian scenario, sugarcane bagasse. In other words, the same approach that allowed oil refineries to achieve a high productivity is herein applied to biorefineries.

The validation of BSE tools for assessing different routes for bioethanol, however, must be based on real data. With this purpose, this project joins efforts of a group of researchers from the Chemical Engineering Department of UFSCar and from Brazilian Agricultural Research Corporation (EMBRAPA Agriculture Instrumentation). A biochemical route for production of ethanol from sugarcane bagasse is our selected case study, encompassing different technologies, some of them still exploratory: *in situ* production of cellulases in triphasic reactors; feedstock pre-treatment; enzymatic production of pentoses (and their transformation) and of hexoses via a non-conventional process using immobilized enzymes, combined with simultaneous (SSF) or consecutive fermentation (CSF), using *S. cerevisiae* in conventional and non-conventional bioreactors. A global view is necessary to integrate these processes from the early stage of development. Therefore, this project aims simultaneously at providing the necessary software and at researching new feasible routes for bioethanol which, in addition to their intrinsic value, will be employed for validation of the methodology.

## SUMMARY OF RESULTS TO DATE AND PERSPECTIVES

This project, presently in its first year, will implement the necessary software while researching new feasible routes for bioethanol which, in addition to their intrinsic value, will be the case study for validation of the methodology. It is important to notice that the proposed computational applicative, within a web-based environment, may serve as a support tool for other projects within the BIOEN program. It includes the Laboratory for Development and Automation of Bioprocesses (LaDABio), the Laboratory of Enzymatic Process Engineering (LabEnz) and the Biochemical Engineering Group, all from the Department of Chemical Engineering of the Federal University of São Carlos (DEQ/UFSCar) and the Bioprocess Group of the EMBRAPA Agriculture Instrumentation unit, in São Carlos. Cooperation other groups is also evolving (including PEQ/COPPE/UFRJ and DEQ/UFRGS). The project research lines are:

- Development, implementation and validation of a user-friendly integrated computational environment, enabling simulation, optimization, economic evaluation, CO<sub>2</sub> and water usage assessment, analysis of kinetic data.
- Cultivation of microorganisms from EMBRAPA bank (*Aspergillus sp.*), for the production of cellulases and xylanases, using non-conventional triphasic reactors.
- Physical-chemical pre-treatment of bagasse and characterization of the resulting biomass: Production of substrates for bioethanol production fermentation of hexoses and of pentoses.
- Determination of (sub-)optimal bioreactor operational conditions for fermentation of hexoses using free and immobilized enzymes.
- Assessment of the production of ethanol from hemicellulose using free and immobilized enzymes.

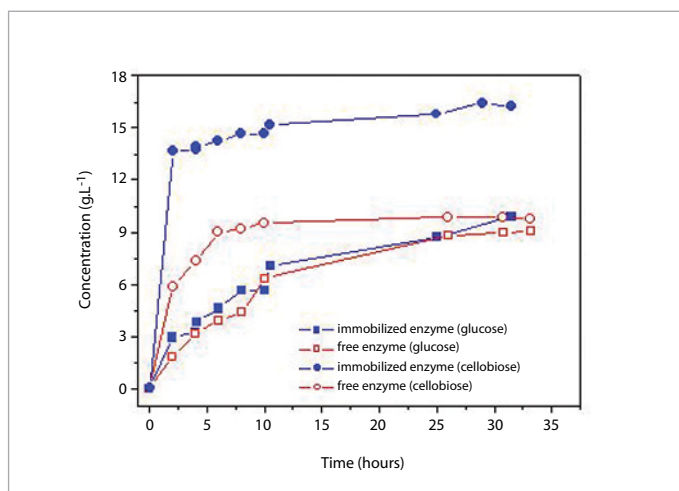


Figure 2. Assessing the performance of immobilization of cellulases. Immobilized enzyme load:  $15 U_{FP} \cdot g^{-1} \text{cellulignin}$ . Free enzyme load:  $5 U_{FP} \cdot g^{-1} \text{cellulignin}$ . All assays: 47°C 0-10h and 37°C until 10-33h, pH 5.0

## MAIN PUBLICATIONS

- Manrich A, Komesu A., Adriano WS, Tardioli PW, Giordano RLC. 2010. Immobilization and stabilization of xylanase by multipoint covalent attachment on agarose and on chitosan supports. *Applied Biochemistry and Biotechnology*. Published on-line, DOI 10.1007/s12010-009-8897-0.
- Farinas CS, Moitas ML, Lemo VA, Bertucci Neto V, Couri S. 2010. Screening of agro-industrial wastes as substrate for cellulase production by solid state fermentation. *Submitted to Annals of Microbiology*.
- Farinas CS, Martin Neto L, Giordano RC. 2010. Instrumentation and automation in the sugarcane ethanol agroindustry. In: *Sugarcane bioethanol: R&D for productivity and sustainability*. Blucher Editor, ISBN 978-85-212-0530-2.
- Pinto GA, Giordano RLC, Giordano RC. 2009. Remote engineering for a cheese whey biorefinery: an Internet-based application for process design, economic analysis, monitoring, and control of multiple plant sites. *Bioprocess and Biosystems Engineering*. **32**:69-78.
- Trovati J, Giordano RC, Giordano RLC. 2009. Improving the performance of a continuous process for the production of ethanol from starch. *Applied Biochemistry and Biotechnology*. **156**:76-90.
- Cruz AJG, Cerri MO, Futiwaki L, Badino Jr AC. 2008. Average shear rate for non-Newtonian fluids in a concentric-tube airlift bioreactor. *Biochemical Engineering Journal*. **39**:51-57.
- Giordano RC, Bertini Jr J, Nicoletti MC; Giordano RLC. 2008. Online filtering of CO<sub>2</sub> signals from a bioreactor gas outflow using a committee of constructive neural networks. *Bioprocess and Biosystems Engineering*. **31**:101-109.
- Giordano RLC, Trovati J, Schmidell W. 2008. Continuous production of ethanol from starch using glucoamylase and yeast co-immobilized in pectin gel. *Applied Biochemistry and Biotechnology*. **147**:47-61.

### Roberto de Campos Giordano

Centro de Ciências Exatas e de Tecnologia  
 Universidade Federal de São Carlos (UFSCar)  
 Via Washington Luis, km 235 – Monjolinho  
 Caixa Postal 676  
 CEP 13565-905 – São Carlos, SP – Brasil

+55-16-3351-8708  
 roberto@ufscar.br